




CONVENIENT DEPOSIT
FOR VARIOUS
OPERATIONS ON
BUSINESS PREMISES

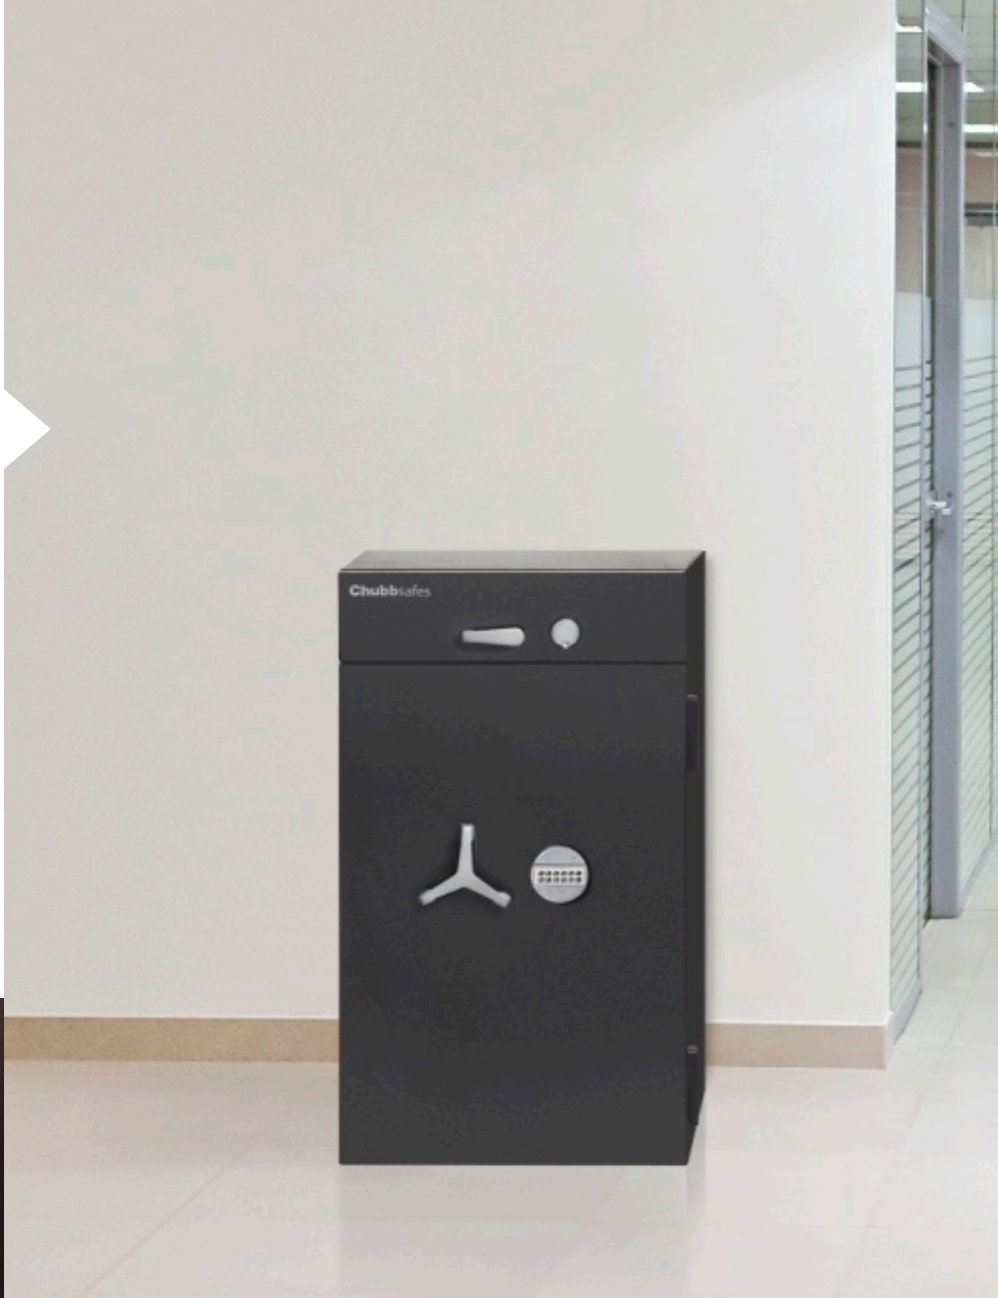

PROGUARD DT

BURGLARY-RESISTANT PROTECTION




KEY FEATURES

- Certified, tested and approved in accordance with the European EN 1143-2 standard, in Grades DI and DII.
- EN 1143-2 certified meaning that insurance ratings are not affected by the additional deposit function.
- Built using the same technology as the ProGuard, which is certified in accordance with the European EN 1143-1 standard for Grade II.
- Constructed using a new composite material designed for strength and reduction in total weight, keeping transportation and installation costs to a minimum.
- Solid steel three-way boltwork.
- Anti-fishing device to prevent anyone reaching the contents through the drawer.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to resist burglary attempts.
- A Class A mechanical key lock or a Class B electronic lock, approved in accordance with EN 1300, available as primary lock options. Electronic locks increase the level of security and prevent unauthorised access.
- Drawer trap fitted with a Class A key lock.

PROGUARD DT

PRODUCT SPECIFICATIONS

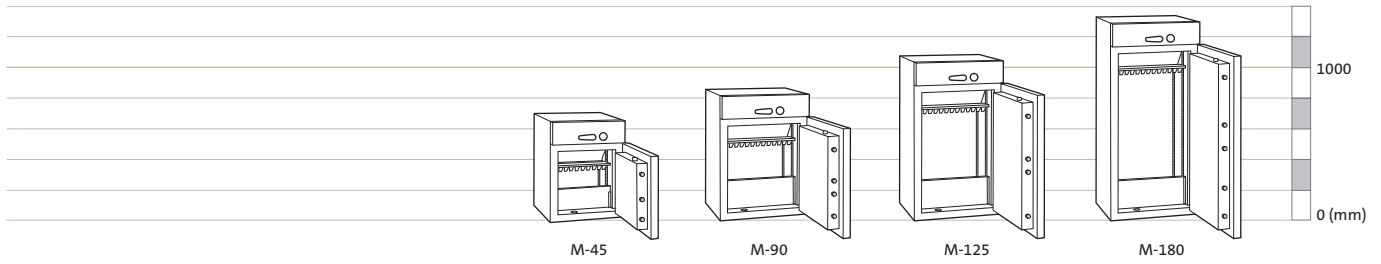

Model	External Height (mm)	External Width (mm)	External Depth (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Net Weight (kg) Gr I	Net Weight (kg) Gr II	Capacity* (litres)	Drawer Width (mm)	Drawer Depth (mm)
M-45	687	500	521	314	400	360	162	302	45	350	230
M-90	847	600	561	474	500	386	218	426	91	450	230
M-125	1052	600	561	659	500	386	242	499	127	450	230
M-180	1307	600	561	934	500	386	290	602	180	450	230

* Useable volume below deposit and anti-fishing device.

Drawers internal dimensions (mm)

Height	Width M-45	Width M-90–M-180	Depth
90	350	450	230

LOCK OPTIONS

The drawer trap is locked with a Class A key lock. The safe can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A).

The primary lock on the safe can be supplemented by a combination lock or both a key lock and electronic lock can be fitted.

All locks are independently tested and are certified in accordance with the EN 1300 standard. ProGuard DT's high-security electronic lock – certified Class B – includes the following features, easily programmed by the owner:



- 1 master code, 1 supervisor code and 8 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened.
- Opening window between 1–19 minutes.
- Equipped with time delay override.
- Optional function to raise silent alarm if lock is being opened under duress.

Authorised dealer

BURGLARY TESTING



ProGuard DT has been EN 1143-2 certified in Grades DI and DII by ECB-S¹. This fully graded burglary protection means that insurance ratings for the safe are not affected by the drawer trap function.

A range of attack tools were used to test ProGuard DT's level of resistance, from basic tools to sophisticated thermal and electrical equipment.

1. European Certification Board-Security Systems



ProGuard DT is accredited by Secured by Design and meets police approved standards.



Approved by the Association of Insurance Surveyors

www.chubbsafes.co.uk