



**DUAL RESISTANCE**  
AGAINST BURGLARY  
AND FIRE FOR  
**INCREASED**  
**PROTECTION**



# DUOGUARD GI T2

T2-CERTIFIED BURGLARY AND FIRE-RESISTANCE




## KEY FEATURES

- Burglary protection in accordance to the highest certified resistance levels, available in Grade I T2, certified by ECB•S in accordance with the stringent European standard, EN 1143-1 T2. DuoGuard hereby complies and is certified with the world's strictest requirements for quality and burglary resistance.
- EN 1143-1:2019 is the latest version of this globally respected burglary resistant standard. The new T2 classification includes tests with the more powerful and effective versions of the tools available to burglars today: Power tools, grinders, cutters and thermal tools have upgraded performance over earlier models. DuoGuard T2 models provide protection against current and foreseeable future threats.
- Models from 60 to 445 are approved by ECB•S in accordance with EN 1047-1 in class S 60 P for one hour's fire protection of paper documents.
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity
- The three-way boltwork is made from solid steel bolts.
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts. (T200X carbide-clad steel plates).
- Certified by RISE (Research Institutes of Sweden) in accordance with fire resistance class NT Fire 017 - 60 paper for one-hour fire protection.

# DUOGUARD GI T2

## PRODUCT SPECIFICATIONS

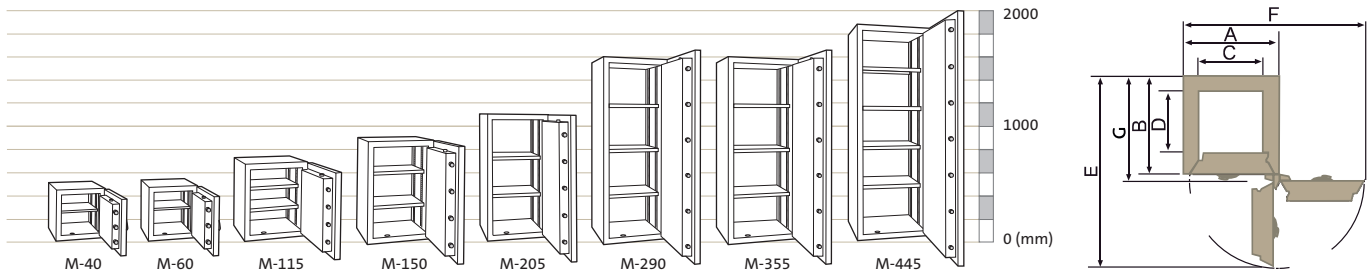

Model	External Height	External Width* (A)	External Depth** (B)	Depth Include Handle & Hinge (G)	Internal Height	Internal Width*** (C)	Internal Depth (D)	Depth with door at 90° Open (E)	Width with door fully open (F)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-40	435	500	456	511	335	400	295	942	1015	40	100	1
M-60	530	500	521	576	430	400	360	1007	1015	62	123	1
M-115	690	600	561	616	590	500	386	1147	1215	114	175	2
M-150	875	600	561	616	775	500	386	1147	1215	150	212	2
M-205	1150	600	561	616	1050	500	386	1147	1215	203	264	2
M-290	1600	600	561	616	1500	500	386	1147	1215	290	337	3
M-355	1600	675	585	640	1500	575	410	1246	1365	354	374	3
M-445	1850	675	615	670	1750	575	440	1276	1365	443	436	4

All figures are in millimeters unless otherwise stated. Projection of hinge\*(20mm) and projection of handle\*\*(65mm) not included. \*\*\*Width excluding shelf racking strips. Racking reduces the internal width by 15mm.

### INTERNAL FITTINGS

1. Model 115 to 205 comes standard with two pieces of adjustable shelf and three pieces for model 290.

### OPTIONAL INTERNAL FITTINGS

- Extendable shelf
- Lockable drawer
- Lockable compartment

### LOCK OPTIONS

As the primary locking option, DuoGuard safes can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A). Dual locking is available from model 60 and up. The primary lock can be supplemented by a combination lock or both a key lock and electronic lock can be fitted. All locks are independently tested and are certified in accordance with the EN 1300 standard.

### FIRE TESTING

DuoGuard from M60 to M445 has been approved in accordance with the European standard, EN 1047-1 in fire class S 60 P, which means the safe will protect paper documents for one hour. This certification was awarded by ECB•S (European Certification Board•Security Systems).

### BURGLARY TESTING

Tested and certified by ECB•S in accordance with the the upgraded T2 certification of the EN 1143-1 standard, incorporating new, more advanced, and powerful tools. A range of tools typically used in burglary attempts were used to test the DuoGuard's level of resistance, from basic equipment such as hammers and simple drills, to sophisticated thermal and electrical equipment, such as oxyacetylene torches and disc cutters.

Authorised dealer

GUNNEBO MALAYSIA SDN. BHD. (877658-K)  
 Suite 13A.01, Level 13A  
 Menara Summit,  
 Persiaran Kewajipan USJ 1,  
 47600 Subang Jaya, Selangor  
 WhatApps: + 6016-800 3119  
 Tel: + 603-8024 3050  
 Fax: + 603-8024 3051  
 Website: [www.gunnebo.com/en-my/service/](http://www.gunnebo.com/en-my/service/)  
 Email: [info.my@gunnebo.com](mailto:info.my@gunnebo.com)

[www.chubbsafes.com/en-my](http://www.chubbsafes.com/en-my)