




CERTIFIED **COMBINED**
PROTECTION AND
MAXIMISED
STORAGE FOR YOUR
PROFESSIONAL
LOCATION



DUOGUARD GII T2

T2-CERTIFIED BURGLARY AND FIRE-RESISTANCE




KEY FEATURES

- Burglary protection in accordance to the highest certified resistance levels, available in Grade II T2, certified by ECB+S in accordance with the stringent European standard, EN 1143-1 T2. DuoGuard hereby complies and is certified with the world's strictest requirements for quality and burglary resistance.
- EN 1143-1:2019 is the latest version of this globally respected burglary resistant standard. The new T2 classification includes tests with the more powerful and effective versions of the tools available to burglars today: Power tools, grinders, cutters and thermal tools have upgraded performance over earlier models. DuoGuard T2 models provide protection against current and foreseeable future threats.
- Approved by SP Technical Research Institute of Sweden in accordance with fire resistance class NT Fire 017 – 90 paper and SP's certification rules for fire resisting storage cabinets, SPCR 002.
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs.
- The three-way boltwork is made from solid steel bolts.
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts.
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.

DUOGUARD GII T2

PRODUCT SPECIFICATIONS

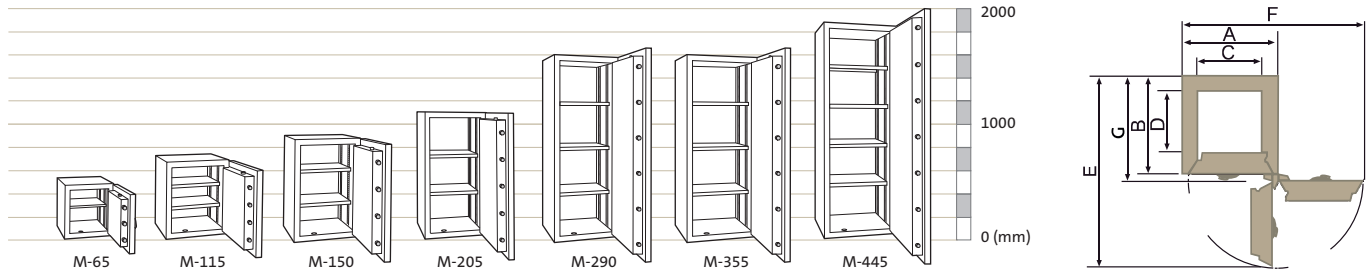

Model	External Height	External Width* (A)	External Depth** (B)	Depth Include Handle & Hinge (G)	Internal Height	Internal Width*** (C)	Internal Depth (D)	Depth with door at 90° Open (E)	Width with door fully open (F)	Capacity (litres)	Net Weight (kg)	No. of Shelves
M-65	578	526	547	602	452	400	360	1047	1067	65	265	1
M-115	716	626	587	642	590	500	386	1187	1267	114	379	2
M-150	901	626	587	642	775	500	386	1187	1267	150	456	2
M-205	1176	626	587	642	1050	500	386	1187	1267	203	582	2
M-290	1626	626	587	642	1500	500	386	1187	1267	290	748	3
M-355	1626	701	611	666	1500	575	410	1286	1416	354	829	3
M-445	1876	701	641	696	1750	575	440	1315	1416	443	970	3

All figures are in millimeters unless otherwise stated. Projection of hinge*(20mm) and projection of handle**(65mm) not included. ***Width excluding shelf racking strips. Racking reduces the internal width by 15mm.

INTERNAL FITTINGS

1. Model 115 to 205 comes standard with two pieces of adjustable shelf and three pieces for model 290.

OPTIONAL INTERNAL FITTINGS

- 2. Extendable shelf
- 3. Lockable drawer
- 4. Lockable compartment

LOCK OPTIONS

As the primary locking option, DuoGuard safes can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A). Dual locking is available from model 115 and up. The primary lock can be supplemented by a combination lock or both a key lock and electronic lock can be fitted. All locks are independently tested and are certified in accordance with the EN 1300 standard.

FIRE TESTING

DuoGuard GII has been approved in accordance with the Swedish standard, NT Fire 017 – 90 Paper, which means the safe will protect paper documents for 90 minutes. This certification was awarded by RISE (Research Institutes of Sweden).

The safe is placed in a furnace and heated to a temperature of almost 1000°C for 90 minutes to simulate the effects of a severe fire.

BURGLARY TESTING

Tested and certified by ECB-S in accordance with the the upgraded T2 certification of the EN-1143-1 standard, incorporating new, more advanced, and powerful tools. A range of tools typically used in burglary attempts were used to test the DuoGuard's level of resistance, from basic equipment such as hammers and simple drills, to sophisticated thermal and electrical equipment, such as oxyacetylene torches and disc cutters.

Authorised dealer

GUNNEBO MALAYSIA SDN. BHD. (877658-K)
 Suite 13A.01, Level 13A
 Menara Summit,
 Persiaran Kewajipan USJ 1,
 47600 Subang Jaya, Selangor
 WhatApps: + 6016-800 3119
 Tel: + 603-8024 3050
 Fax: + 603-8024 3051
 Website: www.gunnebo.com.my
 Email: info.my@gunnebo.com

www.chubbsafes.com/en-my