





CERTIFIED **COMBINED**
PROTECTION AND
MAXIMISED
STORAGE FOR YOUR
PROFESSIONAL
LOCATION

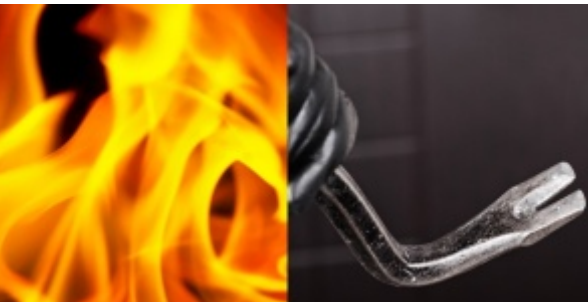

DUOGUARD GII

BURGLARY & FIRE-RESISTANT PROTECTION



KEY FEATURES


- Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB+S for Grade II.
- Approved by SP Technical Research Institute of Sweden in accordance with fire resistance class NT Fire 017 – 90 paper and SP's certification rules for fire resisting storage cabinets, SPCR 002.
- The three-way boltwork is made from solid steel bolts.
- Torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight and minimising transportation and installation costs
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to withstand burglary attempts.
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options.
- Ergonomic soft-touch handle and a range of internal fittings to maximise storage capacity.

DUOGUARD GII

PRODUCT SPECIFICATIONS

Model	External Height (mm)	External Width (mm)	External Depth (mm)*	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight (kg)
M-65	578	526	547	452	400	360	65	265
M-115	716	626	587	590	500	386	114	379
M-150	901	626	587	775	500	386	150	456
M-205	1176	626	587	1050	500	386	203	582
M-290	1626	626	587	1500	500	386	290	748
M-355	1626	701	611	1500	575	410	354	829
M-445	1876	701	641	1750	575	440	443	970

*+60mm (Handle protrudes from the surface)

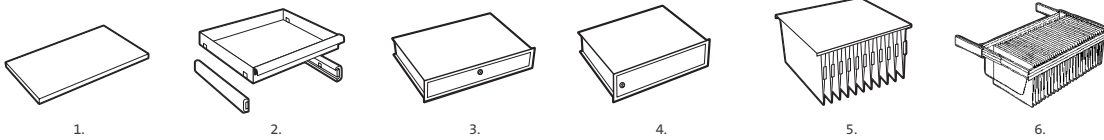

INTERNAL FITTINGS

1. Shelf
2. Extendable shelf
3. Extensible drawer
4. Lockable drawer
5. Shelf for hanging files (model 115 and above)
6. Suspension file frame

LOCK OPTIONS

As the primary locking option, DuoGuard safes can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A).

Dual locking is available from model 115 and up. The primary lock can be supplemented by a combination lock or both a key lock and electronic lock can be fitted.

All locks are independently tested and are certified in accordance with the EN 1300 standard. DuoGuard's high-security electronic lock – certified Class B – includes the following features, easily programmed by the owner:



- 1 master code, 1 supervisor code and 8 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened.
- Opening window between 1–19 minutes.
- Equipped with time delay override.
- Optional function to raise silent alarm if lock is being opened under duress.

Authorised dealer

GUNNEBO MALAYSIA SDN. BHD. (877658-K)
 Suite 13A.01, Level 13A
 Menara Summit
 Persiaran Kewajipan USJ 1,
 47600 Subang Jaya, Selangor
 Tel: + 603-8024 3050
 Fax: + 603-8024 3051
 Website: www.gunnebo.com.my
 Email: info.my@gunnebo.com

www.chubbsafes.com.my

FIRE TESTING

DuoGuard GII has been approved in accordance with the Swedish standard, NT Fire 017 – 90 Paper, which means the safe will protect paper documents for 90 minutes. This certification was awarded by SP Technical Research Institute of Sweden.

STAGE 1

The cabinet is placed in a furnace and heated to a temperature of almost 1000°C for 90 minutes to simulate the effects of a severe fire.

STAGE 2

The cabinet is removed from the furnace and cooled. When opened, the inner temperature of the cabinet must not exceed 150°C.

BURGLARY TESTING

DuoGuard GII has been approved by ECB•S in accordance with the European EN 1143-1 standard for burglary protection in Grade II. A range of attack tools were used to test DuoGuard GII's level of resistance, ranging from basic tools to sophisticated thermal and electrical equipment.