


DUAL PROTECTION

AGAINST BURGLARY AND FIRE FOR YOUR VALUABLE ITEMS, CASH AND DOCUMENTS AT HOME AND OFFICE



KING COBRA MK II

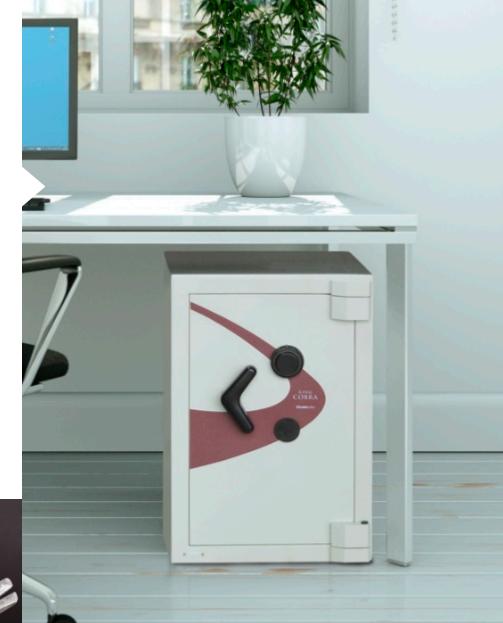


KEY FEATURES

- Body barrier thickness of 65mm; constructed from steel, welded throughout and filled with specially formulated Chubbsafes barrier material.
- A solid composite 35mm thick door is combined with additional protection plates for crucial locking areas.
- Solid steel moving bolts with a 28.5mm diameter affix the door to the body, while fixed "anti-heeling" bolts on both front and rear edges protect the door from prying attack.
- A Polyurethane base paint finish is used to coat the body and door. The paint is both scratch resistant and durable
- Tested in accordance with EN 14450 Level S2, certified by ECB•S.
- King Cobra Mk II has been tested in accordance with EN 15659 LFS, and is certified to level 60P by ECB•S giving 1 hour fire protection.



KING COBRA MK II

PRODUCT SPECIFICATIONS

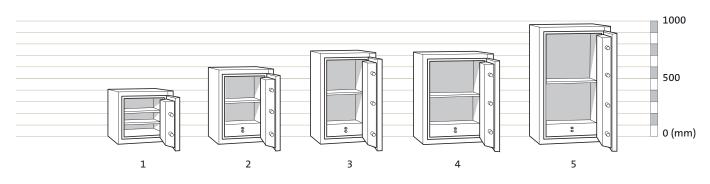

Model	External Height (mm)	External Width (mm)	External Depth* (mm)	Internal Height (mm)	Internal Width (mm)	Internal Depth (mm)	Capacity (litres)	Net Weight** (kg)	No. of Shelves	No. of Drawers
Size 1	400	500	501	270	370	325	32	158	2	0
Size 2	600	500	501	470	370	325	57	213	1	1
Size 3	750	500	501	620	370	325	75	255	1	1
Size 4	750	630	601	620	500	425	132	341	1	1
Size 5	980	630	601	850	500	425	181	421	1	1

 * Handle projection is 56mm. ** In line with certification, weights can vary by +/- 5%

LOCK OPTIONS

As the standard locking option, all models of King Cobra Mk II are fitted with a key lock and a combination lock.



KEY LOCK

Secured by eight-lever double-bitted, non-key retaining key lock.



COMBINATION LOCK

Listed under UL Group 2, VdS class 2, CEN B, A2P B. Gain enhanced control via the Sargent & Greenleaf certified three-wheel combination lock.



ELECTRONIC LOCK

A variety of high security certified electronic locks can be fitted on request.

Authorised dealer

TESTING



BURGLARY

Certified by ECB•S in accordance with the European standard, EN 14450, for burglary protection in S2.



FIRE

Independently tested and certified by ECB-S according to European Standard EN 15659 LFS as providing document fire resistance for up to 60 minutes.

www.chubbsafes.com

